
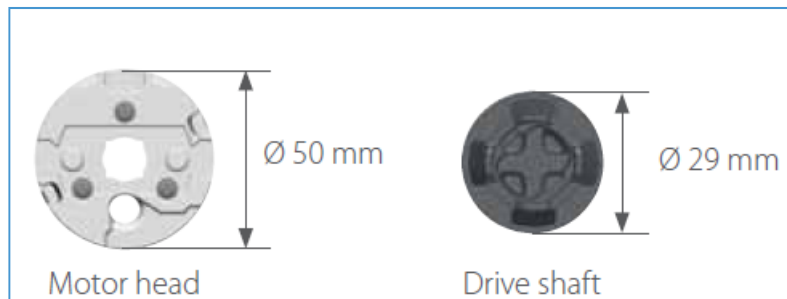


AX50 Plus

Tube Motors with Mechanical Limit Switch

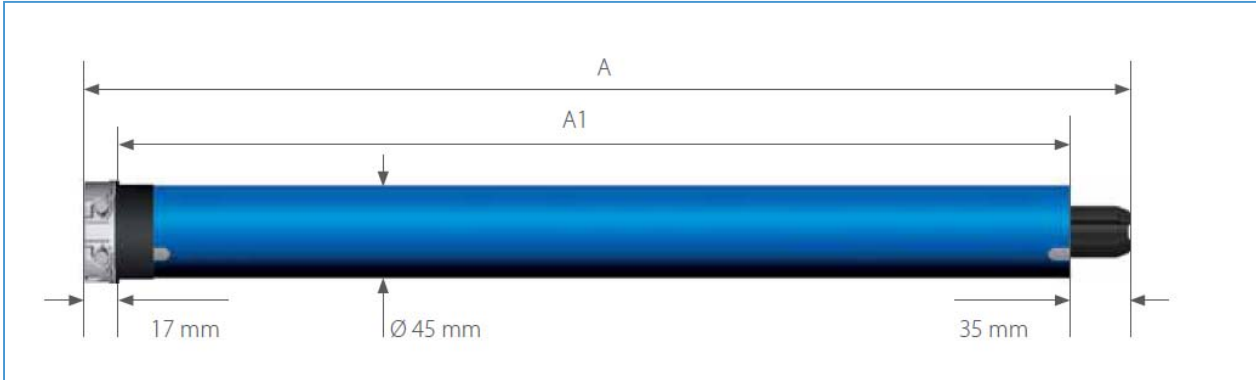

| DIMENSIONS | AX617 | AX1017+ | AX2017+ | AX3017+ |
|------------|-------|---------|---------|---------|
| A1 | 488 | 488 | 513 | 548 |
| A | 505 | 505 | 530 | 570 |

| SPECIFICATIONS | AX617 | AX1017+ | AX2017+ | AX3017+ |
|------------------------|-------|---------|---------|---------|
| TORQUE (Nm) | 6 | 10 | 20 | 30 |
| SPEED (Min) | 17 | 17 | 17 | 17 |
| FREQUENCY (Hz) | 50 | 50 | 50 | 50 |
| POWER SUPPLY | 230 | 230 | 230 | 230 |
| LIMIT SWITCH TURNS MAX | 31 | 31 | 31 | 31 |
| ABSORPTION (A) | 0.5 | 0.68 | 0.8 | 1.1 |
| POWER (W) | 115 | 156 | 184 | 240 |
| DUTY RATING (Min) | 4 | 4 | 4 | 4 |
| PROTECTION (IP) | 44 | 44 | 44 | 44 |

P.O. Box 425, Albany Creek, QLD 4035, Australia

T: +61 (0)7 3205 1123

E: info@rotech.com.au

F: +61 (0)7 3205 1124

www.rotech.com.au